

HENDRICKSON LIFT AXLE ORDERING GUIDE: TOUGHLIFT® TRUCK: 13K, 20K, 22K, 25K (STEER & NON-STEER)

This ORDERING GUIDE is intended to assist you in the selection of Hendrickson TOUGHLIFT® STEER & NON-STEER Lift Axles for truck (13K, 20K, 22K, 25K). For comprehensive information on other available Hendrickson models, options and pricing, contact HENDRICKSON CUSTOMER SERVICE at 800.660.2829 (US and Canada) or liftaxle@hendrickson-intl.com. Your Hendrickson Customer Service Representative can help you complete this form.

Company:		Name:		Telephone:	
Email:		Fax:		Location:	

WARNING! FAILURE TO PROVIDE ALL OF THE INFORMATION REQUESTED IN THIS FORM WILL PREVENT HENDRICKSON FROM PROVIDING YOU WITH A SUSPENSION MODEL CONFIGURATION AND PRICE QUOTE. EACH STEP IN THIS FORM REQUIRES YOUR INPUT!

STEP 1: PLEASE SELECT ON-FRAME MOUNTING LOCATION:

*PUSHER (AHEAD OF TANDEM):		TAG (BEHIND TANDEM):	
FOR PUSHER APPLICATIONS ONLY! PROVIDE THE MEASUREMENT FROM BOTTOM OF FRAME RAIL TO BOTTOM OF DRIVE SHAFT AT THE AXLE MOUNTING LOCATION (SEE PAGES 4 - 6 FOR DETAILED INSTRUCTIONS):			

STEP 2: PLEASE SELECT APPLICATION AND CAPACITY:

NON-STEERABLE / DUAL-TIRE CAPACITIES		NON-STEERABLE / SINGLE-TIRE CAPACITIES	
13K		13K	
20K		20K	
22K*		22K*	
25K		25K	
STEERABLE / DUAL-TIRE CAPACITIES			
25K			

NOTES: *TAG APPLICATION (STRAIGHT AXLE) ONLY

STEP 3: PLEASE INDICATE IF THIS IS A ROLL-OFF APPLICATION:


ROLL-OFF?	YES:		NO:	
IF YES, WHERE DO HYDRAULIC CYLINDERS ATTACH TO THE FRAME? SELECT BELOW:				
NEAR CAB:		NEAR DRIVES / TANDEM:		

NOTES: ROLL-OFF NOT AVAILABLE FOR 25K STEERABLE APPLICATION

STEP 4a: ESSENTIAL RIDE HEIGHT INFORMATION:

Step 4b below is **CRITICAL** for determining proper ride height and to select the right suspension for your vehicle and your operating conditions.

Please refer to the graphic to the right and answer **ALL** of the questions in Step 4b:

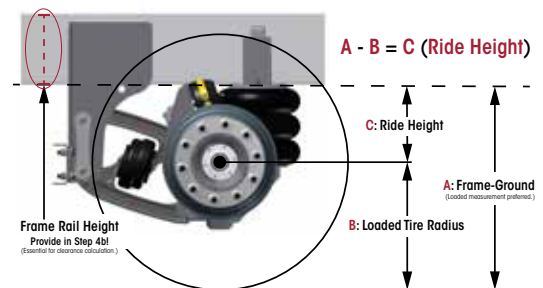

STEP 4b: TO CALCULATE RIDE HEIGHT, PLEASE PROVIDE US WITH ALL OF THE FOLLOWING INFORMATION:

Vehicle's Primary Suspension Type: Air Ride Chalmers HAULMAAX® Mechanical: M-Ride or T-Ride or Other			
PROVIDE ONE, & PLEASE SPECIFY DIMENSION; "loaded" is preferred. (bottom of rail to ground at axle location):		Loaded:	Unloaded:
Preferred Tire Size (example: 255/70R 22.5):			
Truck Frame Width:			

WARNING: FAILURE TO PROVIDE ALL OF THE INFORMATION REQUESTED ABOVE WILL PREVENT HENDRICKSON FROM PROVIDING YOU WITH A SUSPENSION MODEL CONFIGURATION AND PRICE QUOTE. ALL FIELDS IN STEP 4B ARE REQUIRED!

STEP 4c: TO VERIFY CLEARANCE FOR YOUR APPLICATION, PROVIDE US WITH THE FOLLOWING INFORMATION:

¹ Frame Rail Height:		Is this a "Pusher" application (lift axle in front of drive axle)?:	YES	NO
At axle center location, measure from the bottom of frame rail to bottom of the ² FULLY ARTICULATED DRIVELINE:				

IMPORTANT: IF YES ABOVE, PROVIDE DIMENSION.

¹Frame Rail Height is used in the calculation to assure proper tire clearance in relation to the truck's body, etc. Refer to the graphic in Step 4a to understand what is "Frame Rail Height" and where to measure it.

Notes: ²This is essential information! For warnings about and detailed instructions for this procedure, see pages 4 to 6 of this Ordering Guide.

WARNING: FAILURE TO PROVIDE ALL OF THE INFORMATION REQUESTED ABOVE WILL PREVENT HENDRICKSON FROM PROVIDING YOU WITH A SUSPENSION MODEL CONFIGURATION AND PRICE QUOTE. ALL FIELDS IN STEP 4C ARE REQUIRED!

STEP 5: PLEASE SELECT WHEEL-END EQUIPMENT OPTIONS:

Do you require WHEEL ENDS?	Yes	No	If you selected "No", go directly to Step 6.	
Do you require ABS READY?*	Yes	No	*ABS sensor is NOT included (See "Notes")	
Do you require DISC BRAKES?	Yes	No		
Indicate required HUB MATERIAL:	Aluminum:		Ductile Iron:	
Do you require GREASE-FILLED HUBS?	Yes	No		
Do you require DUST SHIELDS?	Yes	No		

See Page 5!

NOTES: *ABS Sensor Kit part number is R-008245-1. Please order separately.

STEP 6: PLEASE SELECT ADDITIONAL SUSPENSION OPTIONS:

Do you require TIREMAAX®	Yes	No	
Do you require PRE-PLUMB?	Yes	No	
Do you require LOCK-STRAIGHT?	Yes	No	For 25k Steerable Dual-Tire Only.

STEP 7: PLEASE SELECT AIR CONTROL KIT OPTIONS:

NOTE: CONTROL KITS ARE SOLD SEPARATELY			
SELECT CONTROL MOUNTING TYPE (CHOOSE ONE):			
NO CONTROL REQUESTED:		OUTSIDE ON FRAME:	The LC Air Kit Manual (H817) is available on the Hendrickson website: www.hendrickson-intl.com
INSIDE CAB:		MARYLAND SPEC:	
IF "OUTSIDE ON FRAME" IS SELECTED ABOVE, CHOOSE ONE OPTION BELOW:			
STEEL BOX:		COMPOSITE BOX:	

NOTES: If you have an application or requirement not covered by Ordering Guide H750, please explain below; a Hendrickson Technical Support representative will contact you shortly.

FOR STEP 3c: MEASURING A FULLY ARTICULATED DRIVELINE

The proper selection and configuration of your Hendrickson auxiliary lift-axle suspension system is essential to the safe and efficient operation of your vehicle. Variance in driveline and truck design require that owner-operators pay particular attention to a number of pre-sale factors that will ultimately determine how well your vehicle and lift axle will work together. This publication will focus on the important issue of driveline clearance. Should you have any questions regarding the following guidelines and procedures, please contact **Hendrickson Technical Support & Warranty** liftaxletech@hendrickson-intl.com

WARNING

SAFETY PRECAUTIONS

PLACE THE VEHICLE ON A LEVEL FLOOR AND CHOCK THE FRONT WHEELS TO HELP PREVENT THE VEHICLE FROM MOVING. RAISING THE TRUCK FOR THE PROCEDURES OUTLINED IN TP-H854 REQUIRES THE USE OF PROPER LIFTING AND JACK EQUIPMENT. DO NOT WORK AROUND OR UNDER A RAISED VEHICLE SUPPORTED ONLY WITH FLOOR JACKS OR OTHER LIFTING DEVICES. FAILURE TO DO SO CAN CAUSE DEATH, PERSONAL INJURY OR DAMAGE TO COMPONENTS.

IMPORTANT NOTES!

Technical Procedure **TP-H854** has as its goal to assist you in providing measurements related to driveline clearance that are required in Hendrickson Ordering Guides and when communicating with Hendrickson Sales and Technical Service personnel. This publication demonstrates the proper method of measuring the distance from the bottom of a truck's frame rail to the bottom of a FULLY ARTICULATED DRIVELINE at the intended location of the lift axle's center point. A FULLY ARTICULATED DRIVELINE is understood as the maximum travel of the truck's driveline, which can be achieved under all operating conditions.

CAUTION

IMPROPER MEASUREMENT CAN LEAD TO DAMAGE TO YOUR VEHICLE AND LIFT AXLE!

In order to properly determine this measurement before a suspension is ordered, Hendrickson requires that a truck with **DUAL DRIVE AXLES** be lifted by its rear drive axle until the suspension "bottoms out", i.e. the rear drive axle lifts off of the ground and the front drive axle tips forward and then also leaves the ground, thereby allowing the driveline to reach its maximum travel. **ONLY THEN CAN AN ACCURATE MEASUREMENT BE COMPLETED.**


If your truck has a **SINGLE DRIVE AXLE**, you must lift the truck by its frame to allow the suspension to extend until the drive tire is off of the ground.

Another option is to calculate this measurement by utilizing data from the manufacturer of your truck, keeping in mind that you need the driveline measurement at the intended location of the lift axle's center point.

For demonstration purposes, **TP-H854** displays a new dual drive axle truck with bare rails in order to clearly show the procedures for measuring a FULLY ARTICULATED DRIVELINE. Variance in truck and suspension design or installed equipment does not change the principles of these technical procedures.

DRIVELINE CLEARANCE BASICS

In the figure on page 5, the clearance between the driveline and the axle weldment must be a minimum of 1 inch when the lift axle is in the raised position. A one-inch clearance is the minimum recommended if (!) we know the maximum travel of the truck's FULLY ARTICULATED DRIVELINE. Please pay particular attention to the following guidelines and procedures to assure proper measurement of this essential dimension.

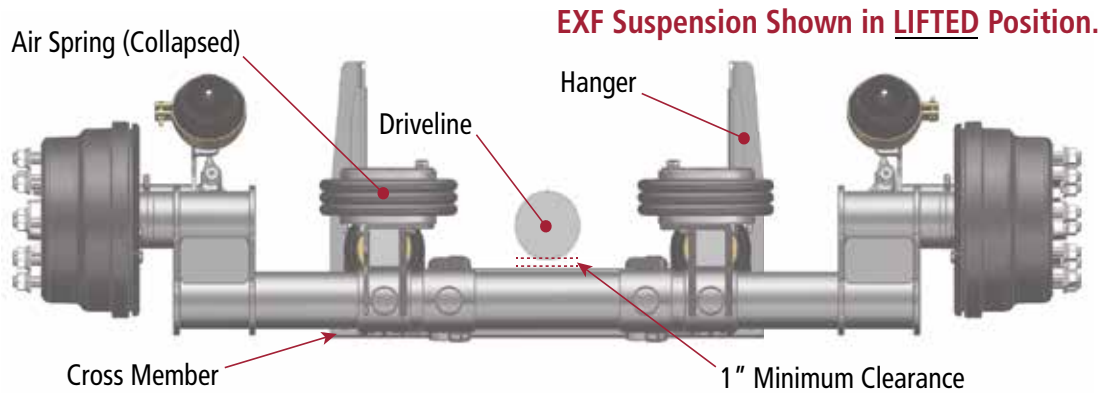


MEASUREMENT PROCEDURES

Required Tools and Materials:

- Truck jack or overhead crane
- Wheel blocks
- Measuring tape

1. You must determine the future location for the lift axle suspension system (i.e. the location of its axle center). Please refer to your local DOT or <https://www.hendrickson-intl.com/Bridge-Laws> for assistance with this.
2. Once you have determined the location for the lift axle, mark the axle's center point on the outside rail of the truck; this mark is where you will measure the fully articulated driveline in the next steps.
3. Block the truck's front wheels to prevent movement.
4. You are now ready to lift the truck's rear drive axle to achieve the driveline's maximum travel. In the following photographs, the truck's rear drive axle is being lifted by a chain and crane sufficient for the weight of the truck. Whatever method you employ, make sure that your lifting equipment is rated for the weight and conditions.

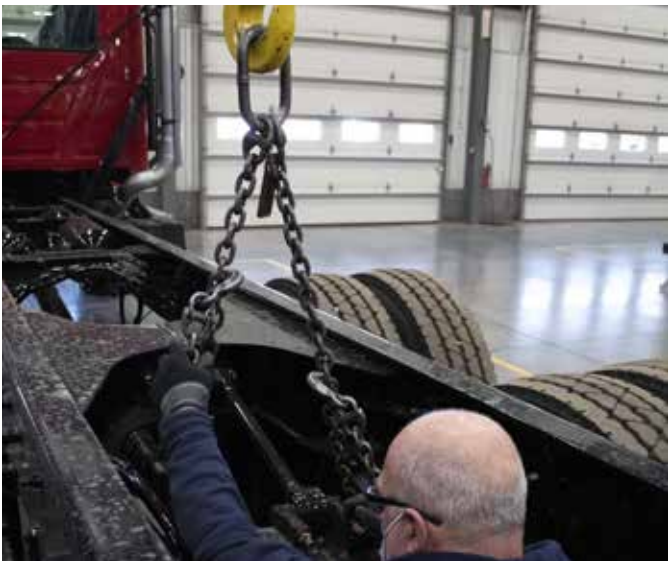


5. Remember, the wheels of the front drive axle must leave the ground in order for the driveline to "bottom out". Note: in the photo above the front tires are about 1/2 inch off of the ground. The "bottom out" point of your driveline can vary.
6. Next, at the marked future location of the lift axle's axle center ("X"), measure the distance from the bottom of the frame rail to the bottom of the driveline as seen in the photo on the next page:

In the image to the right, "X" is the marked position on the truck's side rail of the axle center of the lift axle suspension that will be installed.

The measurement we are taking is from the bottom of the truck's rail to the bottom of the driveline.

Align the edge of your ruler on the center point of the "X". The measurement will be taken from point A to point B.

For demonstration purposes, the photo to the right shows a FULLY ARTICULATED DRIVELINE with a drop of 4.5 inches.

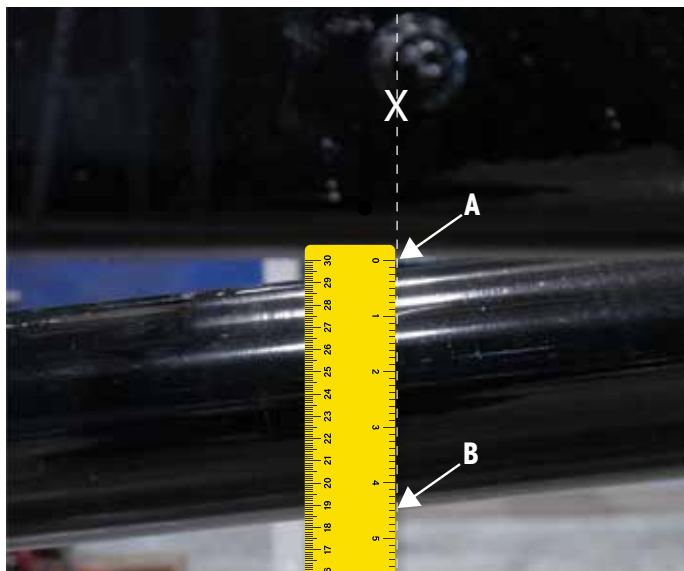

7. Record this measurement for when you fill out **Step 3c** of this Ordering Guide or when communicating with a Hendrickson Technical Service or Sales representative regarding pre-sale specifications.

For STEP 5: Important Information for Hendrickson Customers:

Wheel-End & Hub Options: Any lift axle and suspension system's weight rating is limited by the lowest rating of any constituent component installed into or onto that system. The tire and rim specifications, orientation and load location can also affect the rating of the hubs and hence the axle and suspension system rating as a whole. It is the installer's responsibility to ensure that the axle and suspension system rating (which may be reduced, as indicated above) is not exceeded. Failure to do this can result in damage to the axle and suspension system. A particular concern is the possible "de-rating" of suspension capacity when using offset (dished-out or dished-in) wheels, a situation that can put an excessive load on the bearings and spindle, which can lead to reduced service life and mechanical failures. When utilizing hubs, wheels or bearings not supplied by or recommended by Hendrickson or when replacing Hendrickson-supplied hubs and/or bearings with components not supplied by Hendrickson, it is the buyer's responsibility to consult with the suppliers of those components and all associated supplier literature to assure that the rated capacity of the axle and suspension system or its sub-assemblies will not be exceeded.

Hendrickson Customer Service: If you have questions about this Ordering Guide or the **TOUGHLIFT STEER / NON-STEER Lift Axles** for TRUCK applications, please contact Hendrickson Technical Services by phone 800.660.2829 or e-mail: liftaxletech@hendrickson-intl.com.

Hendrickson Genuine Parts: For long service life and optimal performance, use only **Hendrickson Genuine Parts** when servicing your lift-axle suspensions system.



The World Rides On Us®

Important Information for Hendrickson Customers:

Wheel-End & Hub Options: Any lift axle and suspension system's weight rating is limited by the lowest rating of any constituent component installed into or onto that system. The tire and rim specifications, orientation and load location can also affect the rating of the hubs and hence the axle and suspension system rating as a whole. It is the installer's responsibility to ensure that the axle and suspension system rating (which may be reduced, as indicated above) is not exceeded. Failure to do this can result in damage to the axle and suspension system. A particular concern is the possible "de-rating" of suspension capacity when using offset (dished-out or dished-in) wheels, a situation that can put an excessive load on the bearings and spindle, which can lead to reduced service life and mechanical failures. When utilizing hubs, wheels or bearings not supplied by or recommended by Hendrickson or when replacing Hendrickson-supplied hubs and/or bearings with components not supplied by Hendrickson, it is the buyer's responsibility to consult with the suppliers of those components and all associated supplier literature to assure that the rated capacity of the axle and suspension system or its sub-assemblies will not be exceeded.

Hendrickson Customer Service: If you have questions about this Ordering Guide or the **TOUGHLIFT® Steer / Non-Steer Lift Axle** for TRUCK APPLICATIONS, please contact Hendrickson Technical Services by phone 800.660.2829 or e-mail: liftaxletech@hendrickson-intl.com.

Hendrickson Genuine Parts: For long service life and optimal performance, use only **Hendrickson Genuine Parts** when servicing your lift-axle suspensions system.

Actual product performance may vary depending upon vehicle configuration, operation, service and other factors.
All applications must comply with applicable Hendrickson specifications and must be approved by the respective vehicle manufacturer with the vehicle in its original, as-built configuration.
Contact Hendrickson for additional details regarding specifications, applications, capacities, and operation, service and maintenance instructions.

Call Hendrickson at 800.660.2829 or 800.668.5360 in Canada for additional information.



www.hendrickson-intl.com

H750 Rev P 02-23

© 2017 — 2023 Hendrickson USA, L.L.C. All Rights Reserved. All trademarks shown are owned by Hendrickson USA, L.L.C., or one of its affiliates, in one or more countries.
Information contained in this literature was accurate at the time of publication. Product changes may have been made after the copyright date that are not reflected.

**SPECIALTY PRODUCTS -
AUXILIARY AXLE Systems**

277 North High Street
Hebron, OH 43025 USA
800.660.2829
740.929.5600 • Fax 740.929.5601

Hendrickson Canada ULC

2825 Argenta Road, Unit #2 - 4
Mississauga, ON Canada L5N 8G6
800.668.5360
905.789.1030 • Fax 905.812.9423